



ALL NEW "JP" ALUMINUM TUBING SIDE RAIL



COMBO B-TRAIN WITH JP SIDE RAIL



LODE KINĞ









01_

The JP Rail features a unique aluminum extrusion, designed to allow a full 102" deck width.

02_

 $\left(04\right)$

The exterior face of the rail is recessed to protect the face of the rail and conspicuity tape from damage during loading.

COMBO B-TRAIN WITH JP SIDE RAIL



03_

Winches and J-hooks are bolted to the lower part of the extrusion – no welding required. This allows for easy replacement in the event of damage.

04_

The entire body of the cross-member fits into the JP Rail and is bolted on.











LOAD SECUREMENT

Winches and J-hooks are bolt fastened under the JP rail. This location eliminates potential damage or interference when side-loading.













IO2" DECK WIDTH

The unique extruded JP rail allows for use of the entire deck width. 24" or 48" stake pocket option available. Front bolster is aluminum with optional chamfered corners.














SOLID CONSTRUCTION

16-inch OC 4" aluminum crossmembers, aluminum web stiffeners. 1 5/16" aluminum flooring with 4 nailer strips.

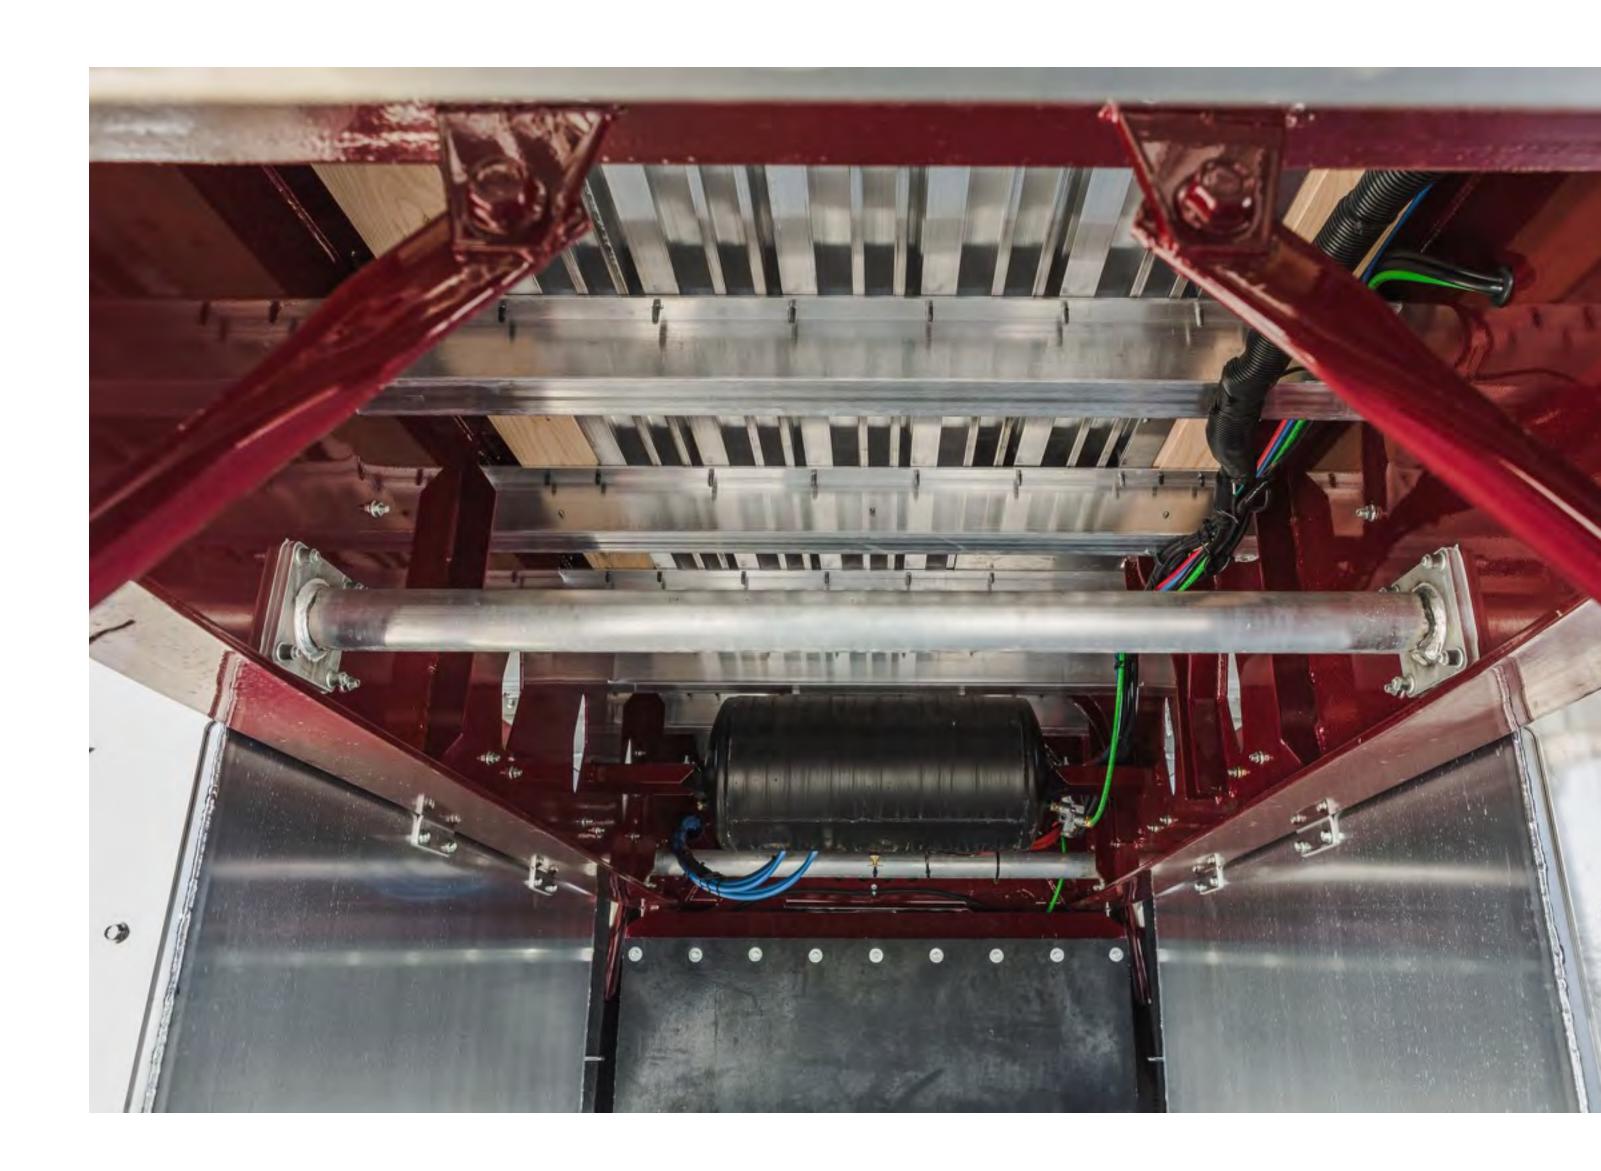











ADDITIONAL OPTIONS

Additional options available to suit your requirements; 4 in a row belting ahead of landing gear, pull out wide load lights, and toolbox or other storage options.





